





3- and 4-stage air-cooled high pressure



up to 420 bar
WP 4325

Weight (kg) and Dimensions (mm)

	WP 3215	WP 4325	WP 4331	WP 4341
kg	300	350	460	550
L	725	700	1340	1400
B	740	700	870	940
H	1120	1235	910	910

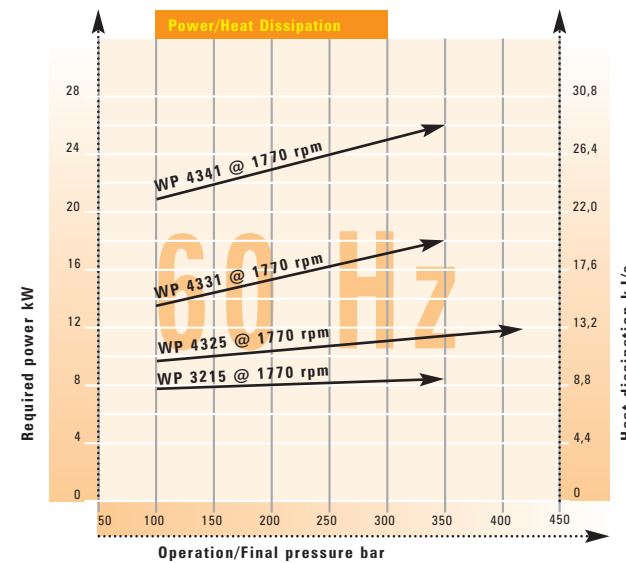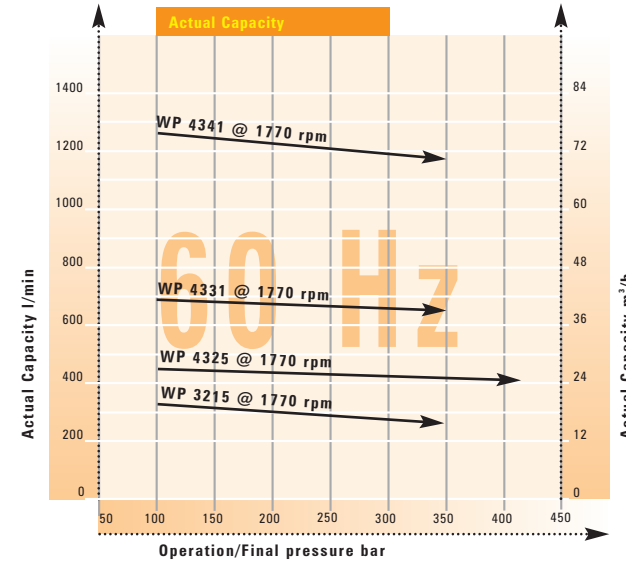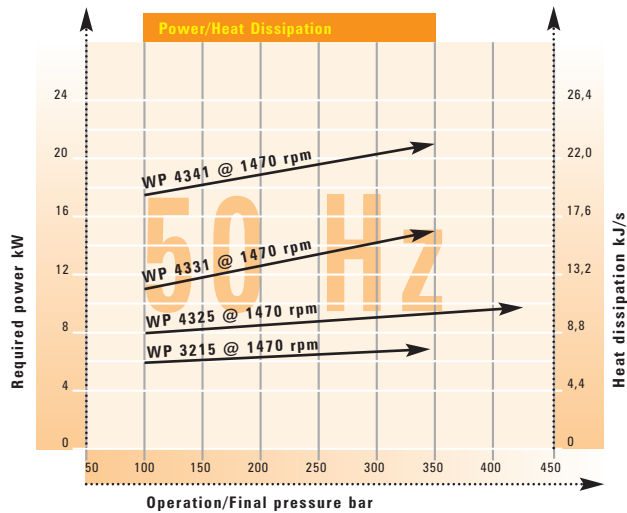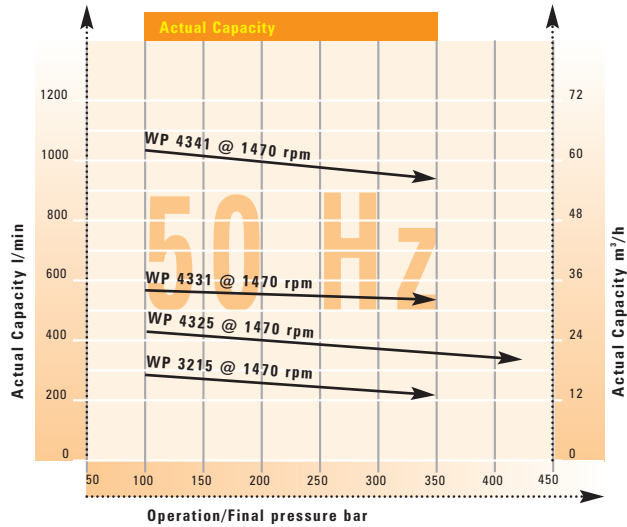

All technical data is valid for the compression of air in accordance with ISO 1217.

All Sauer compressors can additionally be supplied as special versions for the compression of neutral gases such as helium, nitrogen, argon or explosive gases such as hydrogen or natural gas.

Design Data				
Ambient temperature max.: 60°C				
Duty cycle time: continuous				
	WP 3215	WP 4325	WP 4331	WP 4341
Max. operation pressure (bar)	350	420	350	350
Max. speed (rpm)	1800	1800	2000	2000
Stages	3	4	4	4
Cylinder	3	4	4	4